


HEXATHERM[®] XDRAIN

Inverted roof insulation with integral drainage channels

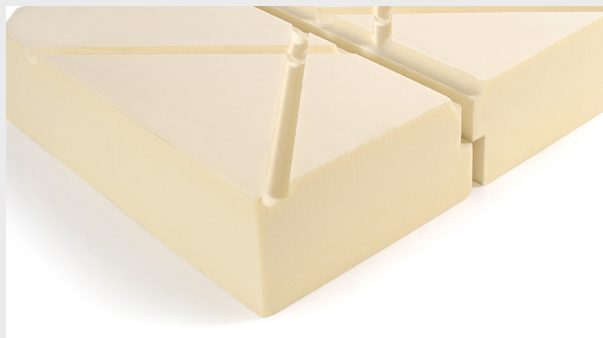


Product Information

CELLECTA's XDRAIN extruded polystyrene inverted roof boards have a unique pattern of drainage channels on their underside, which speeds up the shedding of rainwater whatever their laid orientation, eliminating the need for a separation drainage mat, making them ideal for green roof applications.

Key Benefits

- ⊕ Excellent life-long thermal performance
- ⊕ Integral multi-directional drainage channels
- ⊕ Very low water absorption
- ⊕ High compressive strength - 300kPa

Technical Information

		XDRAIN
Thermal Conductivity EN 12667	W/mK	0.033 ≤80mm 0.034 >81mm
Strength at 10% compression EN 826	kPa	300
Strength at 2% compression EN 1606	kPa	125
Long term water absorption by immersion EN 12087	%	>0.7
Board size	mm	600 x 1250
Standard thickness' (other sizes manufactured to order)	mm	50, 60, 75, 80, 100, 120, 140, 160
Edge profile	-	 Shiplap

Third Party Accreditation and Approvals



Environmental Credentials

