

fermacell® Firepanel A1

The gypsum-bound A1 fire protection panel

A homogeneous gypsum based dry lining board reinforced with non-flammable fibres for superior fire protection.

Applications

Internal application for structural fire protection in the wall and ceiling area.

Approvals


- Labelling in accordance with DIN EN 15283-2
- Building material class DIN EN 13501-1: non-combustible, A1
- IMO FTPC part 1: non-combustible
- Component classifications: National/European

Surfaces

Front and rear sides ground. Imprint of production data and approvals on the rear side, imprint of Firepanel A1 lettering on the front side.

Storage

Packed lying down on pallets, to be protected against moisture, particularly rain.

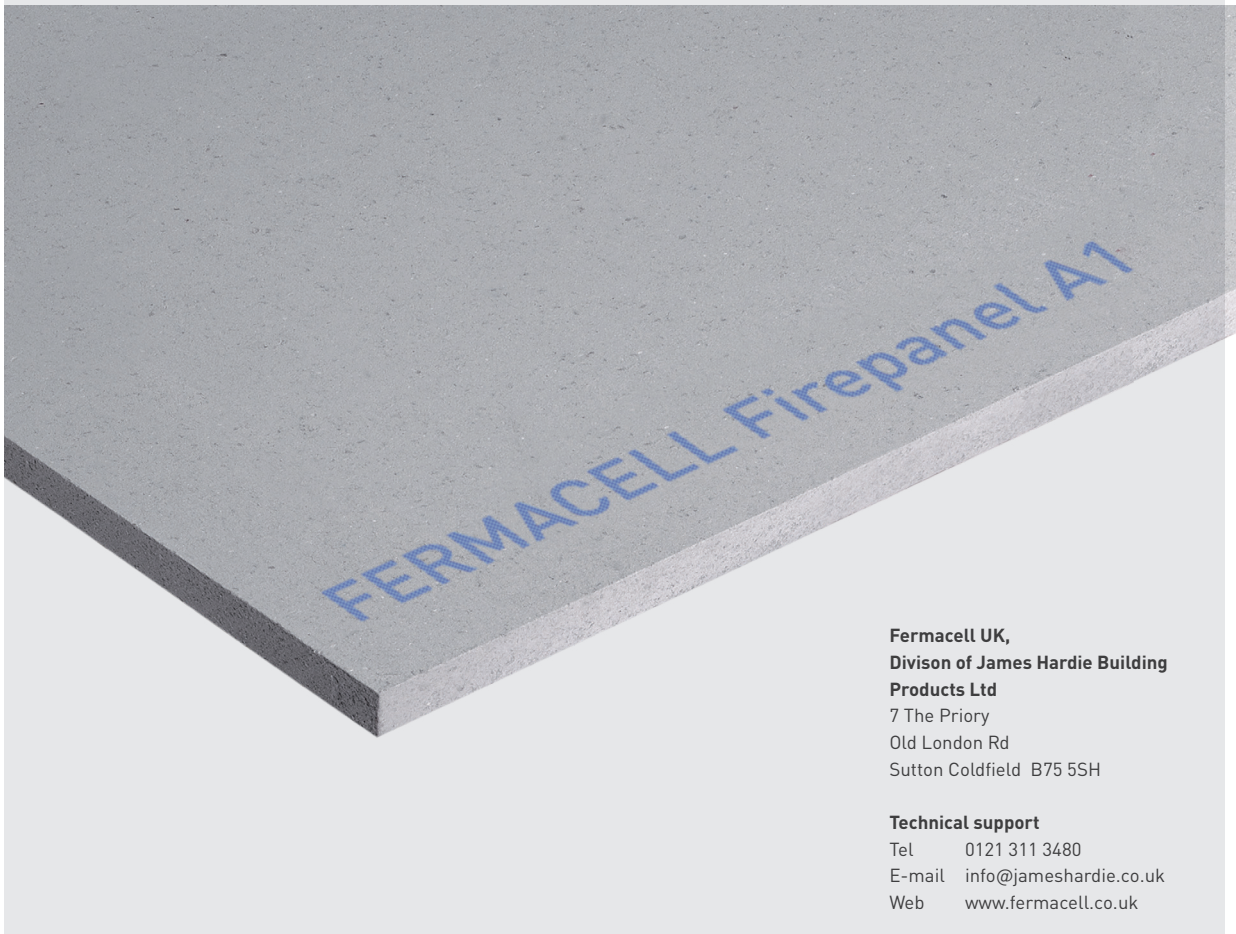

**Fermacell UK,
Divison of James Hardie Building
Products Ltd**
7 The Priory
Old London Rd
Sutton Coldfield B75 5SH

Technical support
Tel 0121 311 3480
E-mail info@jameshardie.co.uk
Web www.fermacell.co.uk

Installation

With conventional wood processing machines, carbide-tipped tools should generally be used when cutting. As is customary when processing gypsum and gypsum fibre boards, we recommend wearing a respirator mask, filter FFP1, if dust is generated.

Substructure spacing*

Wall	≤ board thickness [mm] × 50**
Ceiling	≤ board thickness [mm] × 35

* Additional information in the corresponding processing documents

** Vertical surfaces 2x10 mm ≤ 625 mm

For system and application details please also refer to the fermacell® Orange Book

Coating

Primed, painted, plastered or tiled surfaces.

Material properties

Gross density	1200 ± 50 kg/m ³
Flexural strength	> 5.8 N/mm ²
Balancing humidity at 65% relative humidity and 20°C air temperature	1.3 %
Water vapour diffusion resistance coefficient	μ = 16
Thermal conductivity (in acc. with DIN EN 12664)	λ _{10, tr} = 0,38 W/mK
Expansion/shrinkage in case of a change	0.25 mm/m
pH-value	7 - 8



Dimensional tolerances with regard to balancing humidity for standard

Board thicknesses	10 / 12.5 / 15 mm
Length, width	+ 0 / - 2 mm
Diagonal difference	≤ 2 mm
Thickness tolerance	± 0.2 mm



Formats	10 mm	12.5 mm	15 mm
Surface weight	approx. 12 kg/m ³	approx. 15 kg/m ³	approx. 18 kg/m ³
150x100 cm		•	
200x125 cm	•	•	•
Cut-outs		•	

Additional Information

Our recommendations are based on extensive testing and practical experiences. They do not replace guidelines, standards, approvals and applicable technical data sheets. Due to the large number of possible influences for processing and application, we recommend that you carry out trial processing and application. No claims for compensation may be derived from the information provided. Delivery, processing and the warranty on features assured by us will be in accordance with our General Terms and Conditions.